Operation Instructions

M-205G Single-channel Remote Controller









1 Safety Instructions



Thank you for your purchasing, please read the instructions before using.

2 Product Overview

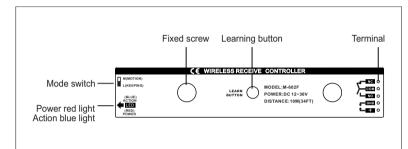



3 Matching Method

- This product is a self-learning code type, the transmitter code must be match with this controller before use, can learn up to 20 transmitters.
- Learning method: Press the receiver's learning button once, the blue indicator light is on, enter the learning state, at this time, press the remote controller's button, the blue light of the receiver will flash twice, means learn successfully. After 5 seconds, it will automatically exit and return to the standby state.
- Delete method: Press and hold the learning button for 5 seconds, the blue light flashes quickly, all the codes will be deleted(Can't delete any single code).

First step: Press the learn button Second step: Press the remote controller's button

4 Input and Output Status Selection

- ② M If the status selection switch is in L position, it is a holding output, output signal is kept. Each time press the remote control, the output state will change once.
- Normally open function in M status: If in "M" status, press and hold the remote control for 3 seconds until the blue indicator light flashes, the receiver entering the normally open mode. When you press the remote control again, the normally open mode will be released.

5 Technical Parameters

Wireless receiver		Transmitter
Power supply:	DC12~30V	Power supply: 3V (2pcs 3V button cells power supply)
Quiescent current:	34mA (DC12Vpower supply)	Transmitting current: 13mA
Action current:	62mA (DC12Vpower supply)	Battery life: every day 50 times, about 270 days
Relay contact capacity	: 1A 24V DC	Receiver sensitivity: -95dbm
Contact holding time:	1.5S	Launch distance: No barrier distance 30m
Appearance size:	110(L)x30(W)x15(H)mm	Appearance size: 58(L)x37(W)x12.6(H)mm