

# Operation Instructions

Make your choice...

## LV802 Exposed Installation Human Figure Recognition Sensor



### 1 Safety Instruction




Thank you very much for purchasing this products, in order to use it correctly, please read this manual carefully before use it.

### 2 Product Overview

<b>Sensor</b>		
<b>Shell</b>		
<b>Base</b>		<ul style="list-style-type: none"> <li>① Metal shrapnel</li> <li>② Sensing range adjustment button *6</li> <li>③ LED indicator light</li> <li>④ Camera</li> <li>⑤ Sensitivity adjustment button</li> <li>⑥ Wiring terminal</li> <li>⑦ Front cover</li> <li>⑧ Top cover</li> <li>⑨ Bottom case</li> <li>⑩ Mounting screw holes</li> <li>⑪ Mounted threading hole</li> <li>⑫ base install screw holes *2</li> </ul>


### 3 Wiring Diagram

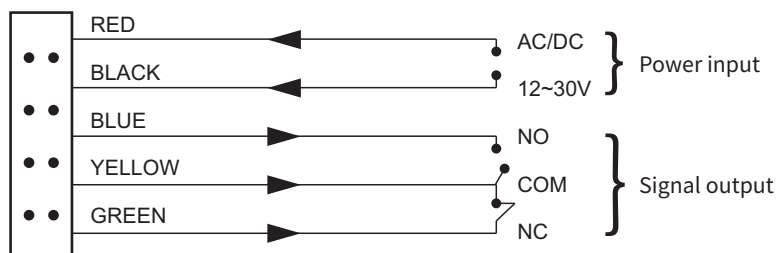

## 4 Installation


[1]

Place the base in the appropriate place, and mark the position (please keep a distance of 2-5cm between the sensor and the door edge). If no need the base, please directly place the bottom case to the place where you need to install and mark the hole position.



[2]

Drill the mounting holes and mounted threading hole according to the mark on the door.

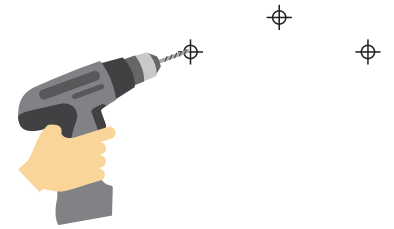


[3]


Fix the base or the sensor's bottom case by screws, tight the metal shrapnel on the both sides of the sensor, and place the sensor into the bottom case.

### Attentions

The scanning range of this series of sensors is unidirectional, when installation on site, please put the "Outward by this side" sign towards the human figure induction direction.




[4]

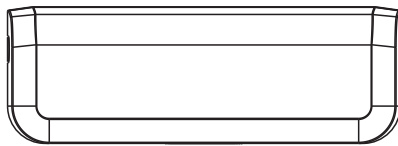

In line with wiring diagram to connect with automatic door operator, and close the top cover.

[5]

Debugging is completed, close the semi-transparent cover (refer to step 5 to debugging).

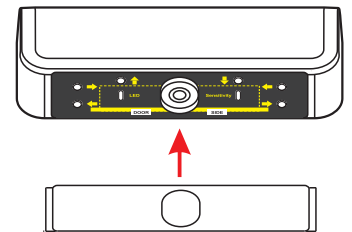

## 5 Adjustment

### Startup


About 30 seconds after power-on, it is the start time of the internal program of the sensor, until you hear a long sound of "beep -", indicating that the sensor enters the working state.

### Sensitivity

Each time you press the **sensitivity adjustment button**, sensitivity is switched once, low sensitivity (three beep sounds), medium sensitivity (two beep sounds), high sensitivity (one beep sound), in total of three working mode adjustable (The factory defaulted is high sensitivity).

### Detection range


- 1) Camera's angle is  $\pm 20^\circ$  adjustable, detection range will move as a whole.
- 2) In the standby state, press the **sensing range adjustment button**, to adjust the detection area.

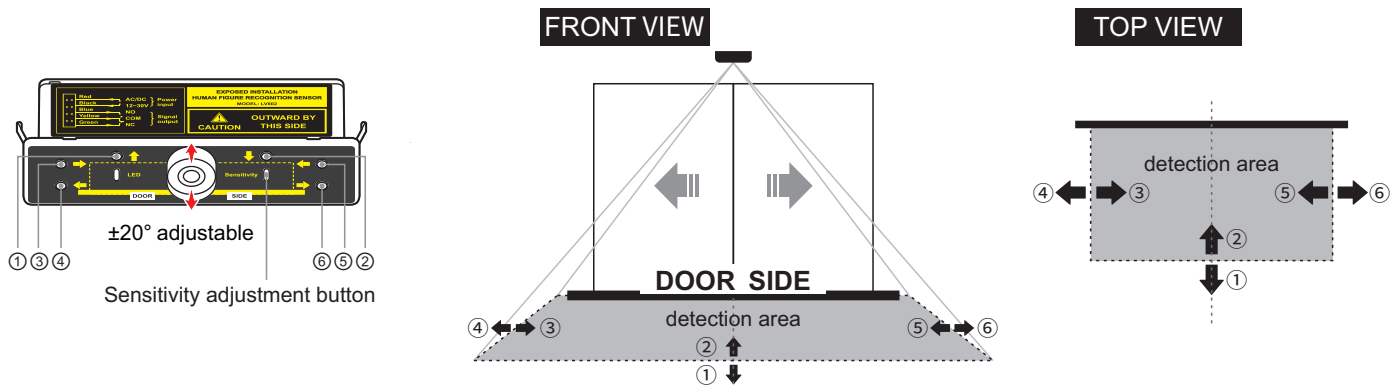

3) Every time you press the **sensing range adjustment button**, the detection range of the every corresponding edge (as shown in the figure) will move 1 level, total of 10 levels, until the sensor have beep beep sounds, means the detection range has been adjusted to limit, the limiting position of edge ③⑤ is center line.

## Factory default detection range


### TOP VIEW

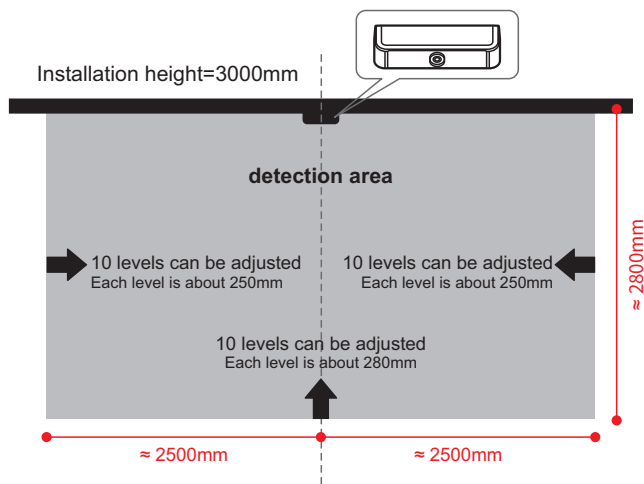

## Restore the default detection range



Don't know the current detection range



Press and hold "←" or "→" button  
for 5 seconds

hear a beep sound

Restore the default

## 6 Troubleshooting

Failures	Possible reasons	Improvements
LED indicator light off	The sensor is not connected to power supply	Check the cable connection, and whether power supply is normal
Red light is always on, but door won't be opened	Wiring fault	Check and adjust the wiring, re-power on
1, Detection isn't sensitive enough; 2, Object movement leads to false triggering.	Sensitivity is too low or too high	Adjust the sensitivity
People near to the doors, but sensing fails	Detection range adjustment deviation	Restore the default detection range and adjust it again



Due to the limitations of AI Neural Network deep learning, in some special scenes, the system will output certain confidence for some non-human figure objects (similar human figure), and it is possible to output signal. Please try to solve the problem by the following methods:

- 1, Rotate the position of the objects, may not be recognized as a human figure.
- 2, Reduce the sensitivity.
- 3, Adjust the lens angle of camera or adjust the detection selection area, so as to avoid the object appearing in the screen.

## 7 Technical parameters

Detection function:	human figure activated, safety	Power supply:	AC/DC 12-30V
Camera pixel:	HD 1080P	Current:	Standby 95mA, action 110mA
Response speed:	100ms	Working temperature:	-20°C~60°C
View angle adjustment:	±20°	Working humidity:	10%~90%RH
LED indicator:	standby in BLUE, sensing in RED	Installation height(max):	5 meters
Installation height(max):	5000mm	Dimension:	157(L)x53(W)x34(H)mm

## 8 Packing list

NO.	ITEM	PCS	REMARK
1	Sensor	1	sensor, and 3 covers
2	Base	1	
3	5-Pin cable	1	2500mm
4	Screws bag	1	
5	Installation instructions	1	