
Operation Instructions

M-213F Automatic Door Magnatic Lock



1 Safety Instructions




Thank you very much for purchasing this product, in order to use it correctly, please read this operation manual carefully before using it.

2 Installation and Adjustment


- Fixing the location holes of the bracket by the suction piece, if the magnetic lock part is not matched with the suction piece, please loosen the suction piece and install it to other side of the bracket to match.
- 2, Fixing the sliding positioned slot by lock body, and adjust the lock body so that it is in the same vertical position with the suction piece.



3 Correct installation drawing

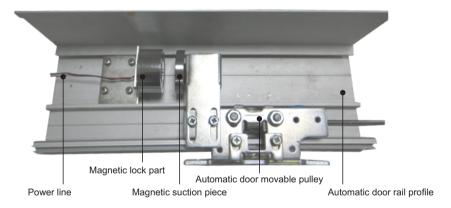

4 Product dimension

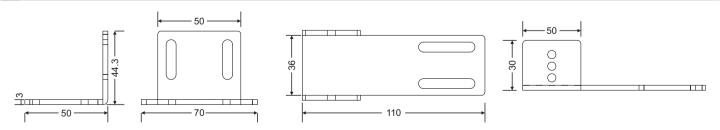

5 Technical Parameter

Voltage input: DC 12V(DC 24V customized)	Working temperature: -20°C~55°C
Working current: 12V/212mA(DC 24V customized)	Working humidity: 0-90%RH
Pull strength: 60KG(130LBS) linear tension	Lock part size: 50(Φ)x35(H)mm
Surface coating: Environmentally friendly chromium plating treatment	Suction piece size: 50(Φ)x9(H)mm